Corrigendum -2


RfP No: LSPDCL/4/works-75 MW solar Park/2026 dated 23.7.2026

LUCKNOW SOLAR POWER DEVELOPMENT CORPORATION LIMITED
(LSDPCL)
***(A** Joint Venture of Uttar Pradesh New and Renewable Energy Development Agency (UPNEDA) and Solar Energy Corporation of India Limited New Delhi)*
IIIrd Floor, UPNEDA building, VibhutiKhand, Gomtinagar Lucknow- 226010
Mob.No. 91-9839017624, Tel.No 0522-3119549
Website:www.upneda.org.in / www.lspdcl.co.in
E-Mail: lspdcl2015@gmail.com/ho_nmk@rediffmail.com


LSPDCL have invited Online Bids (e-tenders) through open tendering, from the eligible Bidders for Work of Chain – Link Fencing across the Boundary of 75 MW Kanpur Nagar Solar Power Park at village lehrapur Tehsil Akbarpur District Kanpur Dehat (U.P.) as per the details given in e-tender document.. The details of tenders can be seen or downloaded from e-Procurement website http://etender.up.nic.in and UP Electronics Corporation's website www.uplc.in.

For reference drawing of 75 MW Chain Link Fencing is below :


FOR TENDER PURPOSE ONLY




HORIZONTAL ANGLE DETAILS

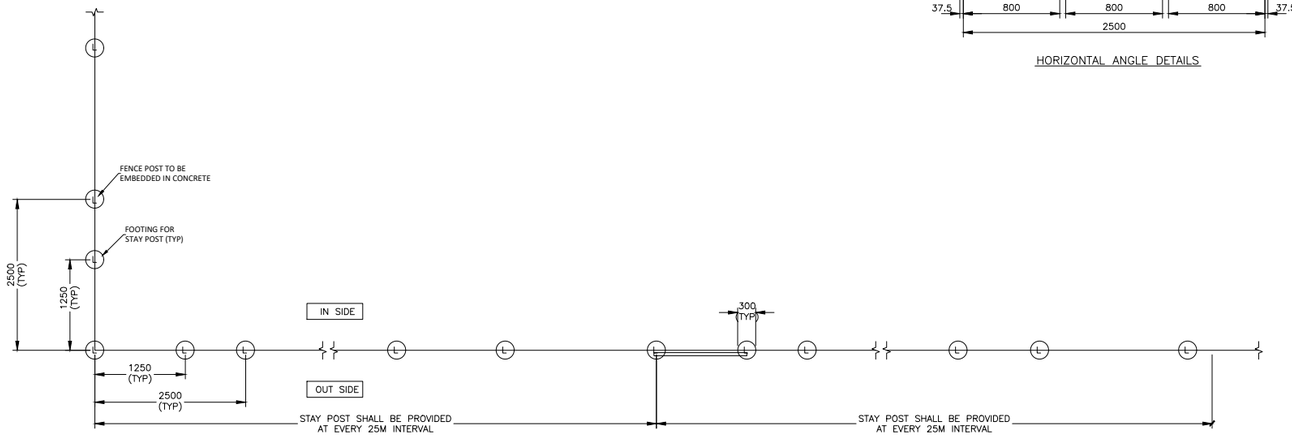


PLAN OF FOUNDATION

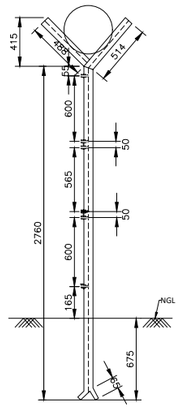


SEC 1–1

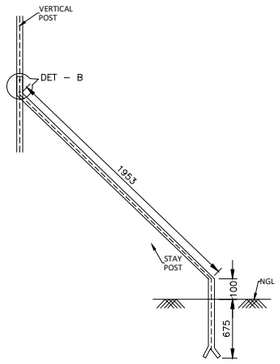


STAY POST DETAILS

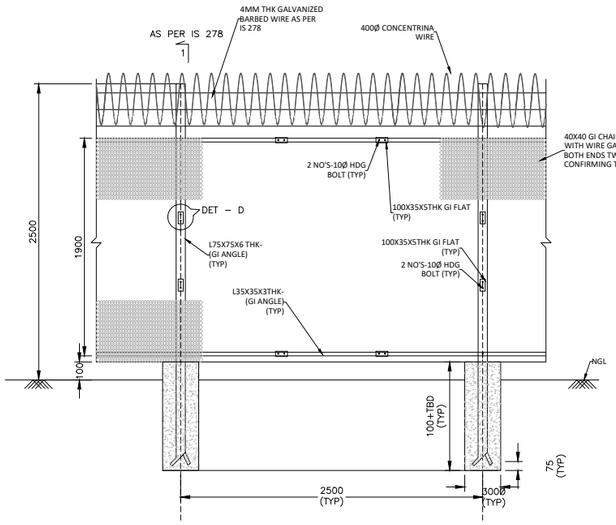


ELEVATION FOR BOUNDARY FENCING

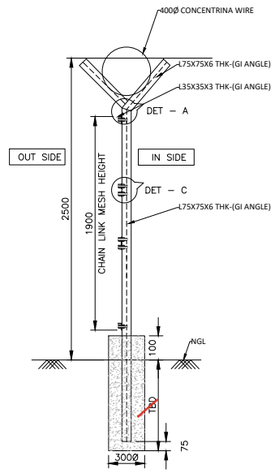

SEC 1–1

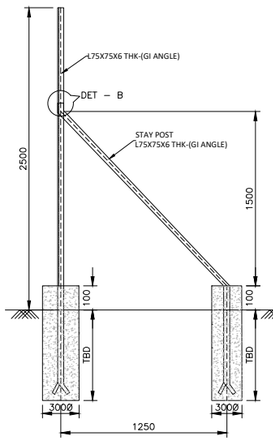


STAY POST DETAILS

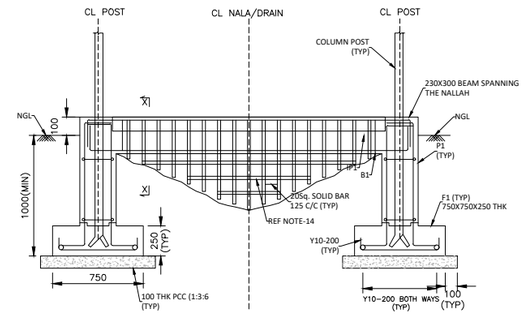


TYPICAL DETAILS AT NALLAH CROSSING/POND

NOTES:


1. ALL DIMENSIONS ARE IN MILLIMETERS AND ELEVATION IN METERS.
2. ALL STRUCTURAL STEEL WORKS SHALL CONFIRM TO IS:2062 GRADE-E250.
3. ALL DIMENSIONS TO BE CHECKED BEFORE FABRICATION OF STEEL WORK.
4. GALVANIZATION ON WIRES SHALL CONFORM TO IS:4826 HEAVY DUTY.
5. GALVANIZATION THICKNESS SHALL BE 60 MICRONS MIN.
6. TOP OF FENCE SHALL FOLLOW THE NATURAL CONTOUR OF LAND.
7. BARBED WIRE SHALL BE OF MINIMUM 4MM DIA AND OF APPROVED MAKE. IT SHALL CONFIRM TO IS:278.
8. THE BARBED WIRES SHALL BE INSERTED IN THE SLOTTED HOLE AND BINDED WITH BINDING WIRES.
9. TWO STAY POST SHALL BE PROVIDED AT EVERY CORNER COLUMN POST AND WHEREVER CHANGE IN ELEVATION /LEVEL.EVERY TENTH INTERMEDIATE POST SHALL BE PROVIDED WITH A STAY POST.
10. GRADE OF CONCRETE SHALL BE M20 (1:1.5:3) WITH 20MM NOMINAL SIZE GRADED AGGREGATES AS PER IS:456.
11. ALL REINFORCEMENT SHALL BE HIGH STRENGTH TMT BARS OF GRADE FE500D CONFORMING TO IS:786.
12. CLEAR COVER TO REINFORCEMENT SHALL BE AS FOLLOWS: FOOTING = 50MM, COLUMN = 40MM & BEAM = 25MM. HOLE DIAMETER SHALL BE 2MM LARGER THAN BOLT DIA.
13. A GRILL OF 20MM SQ. SOLID MS BAR WELDED TO IP1 AT SPACING OF125MM C/C, WITH 20SQ HORZ.BARS OR 35MMX5MM THK FLAT WELDED TO VERTICAL SQ BARS AT SUITABLE INTERVALS (MIN. 3 NO OF THE BARS/FLATS) SHALL BE PROVIDED IN LIEU OF TOE WALL.
14. HEIGHT OF THE VERTICAL SQ SOLID MS BAR WILL VARY BASED ON ACTUAL NALLAH/DRAIN DEPTH.
15. POST ON EITHER SIDE OF NALA SHALL BE SUPPORTED WITH PEDESTAL & FOOTING ARRANGEMENT WITH A BEAM SPANNING ACROSS THE NALLAH/POND TO SUPPORT THE GRILLAGE AS SHOWN.
16. THE FOUNDATION OF THE STAY POSTS SHALL BE OF THE SAME SIZE AS THAT OF THE MAIN POSTS.
17. THE CHAIN LINK MESH FABRIC SHALL BE FIXED AT THREE POINTS EACH TO THE TOP AND BOTTOM EDGE ANGLES USING 100X35X5 GI FLATS.
18. ALL MS PART SHALL BE PAINTED WITH 2 COATS OF EPOXY PAINT OVER 2 COATS OF ZINC CHROMATE PRIMER.
19. ALL WELDS SHALL BE 6MM THICK UNO.
20. THREE NOS. OF 4MM THICK BARBED WIRES SHALL BE FIXED TO EACH ARM OF THE Y-SHAPED ANGLE SUPPORTS, ALONG WITH 400MM DIAMETER GI CONCERTINA WIRE.
21. SPACING BETWEEN BOTTOM OF FENCE AND GROUND LEVEL SHALL NOT BE MORE THAN 100MM.
22. THIS DRAWING CONTAINS ONLY THE FENCE DETAILS. THE FENCE LAYOUT WILL BE PROVIDED ONCE THE BOUNDARY IS FINALIZED.
23. HOLE DIAMETER SHALL BE 2MM LARGER THAN BOLT DIA.




DET–A (TYP)




DET – B (TYP)




DET – C (TYP)




DET – D (TYP)



DETAILS OF IP–1




PEDESTAL(P1) DETAILS



SEC X–X
(B1 230X300)


PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING ARE THE SOLE PROPERTY OF PGEL. ANY REPRODUCTION, IN PART OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF PGEL IS PROHIBITED.

FOR TENDER PURPOSE ONLY

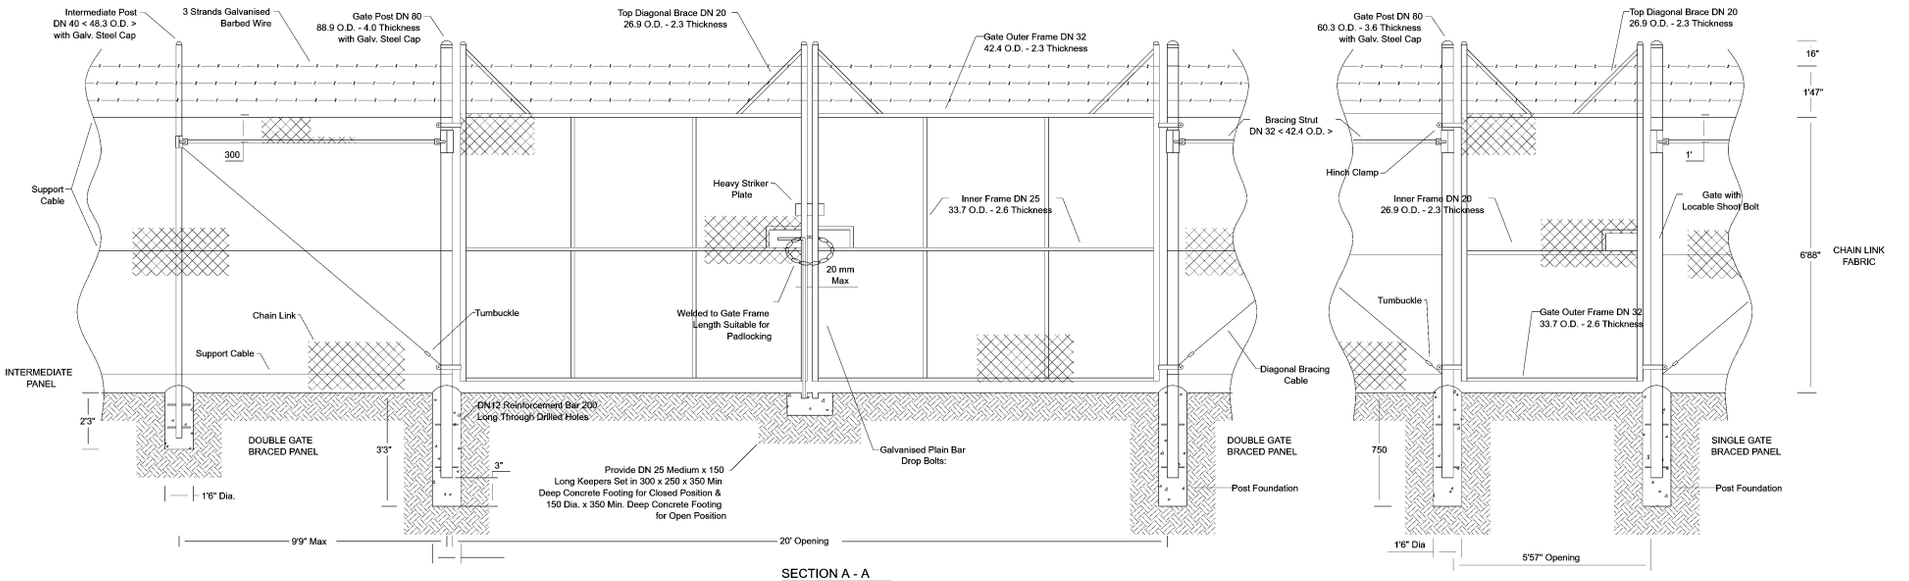

SECTION A - A

OPTION 1 DOOR

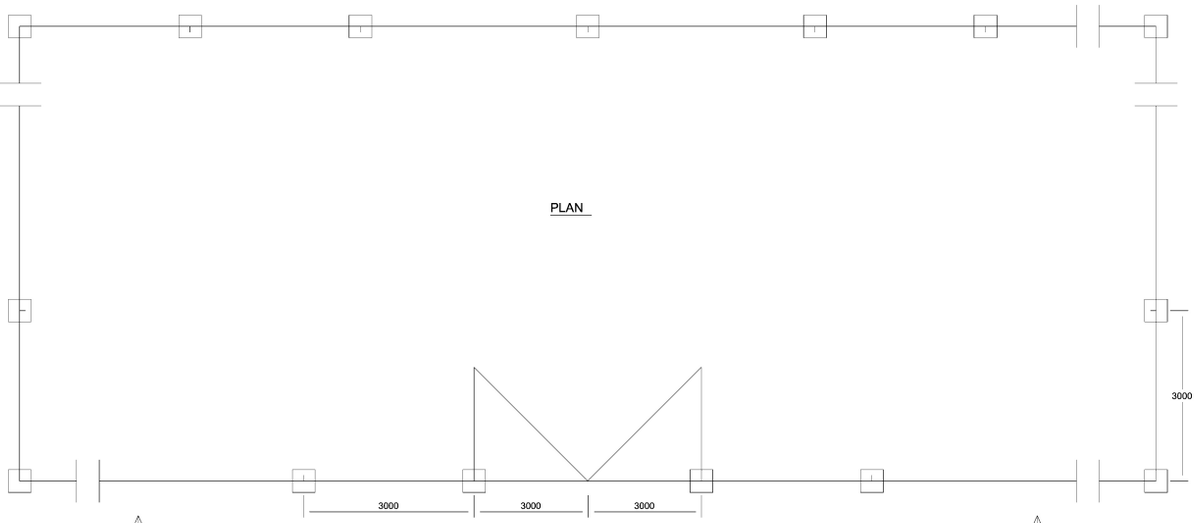

PLAN

NOTES:

1. ALL CHAIN LINK MESH SHALL COMPLY WITH AS1725-2003 (OR LATER).
2. ALL CHAIN LINK MESH SHALL BE:
   +DBC0+DC78 PITCH - 40MM PITCH
   +DBC0+DC78 WIRE - 3.15MM DIA
   +DBC0+DC78 SELVEDGE - KNUCKLE - KNUCKLE (KK)
3. CHAIN LINK MESH WIRE SHALL BE EITHER:
   a. HEAVY DUTY (HD) GALVANISED (CLASS W10) OR
   b. BLACK, POLYVINYL COATED (PVC) AS DIRECTED AS DIRECTED ON THE DRAWING OR THE BOQ.
4. FOUNDATION CONCRETE SHALL BE ORDINARY (17.5MPa).